



The Elevator Bolt Locking System is used on top trays on Best easels. The 2 metal plates and round plastic guide keep the parts parallel which

allows for smoothness and ease when the tray is moved into position. By tightening the knob, the circular plate will seal itself against the mast. This means ultimate stability for the canvas.



Height & tray adjustments unlock easily, yet lock into place & stay locked because of the Wedge-lok System. The metal plate features wedge-cut edges that conform


to the wedge-cut sections of the hardwood. When the knob is tightened, the inward tension pulls the metal plate snugly against the wood for a solid lock.



Slide Guides make angle and height adjustments on Best easels smooth. These circular graphite impregnated plastic inserts are used

wherever there is a slot in the wood of the easel. This part allows for smooth movement and protects the hardwood from the metal bolt.

Box should contain:
• 18 1/4" screws
• 1 carriage bolt with slide guides
• 9 easel parts

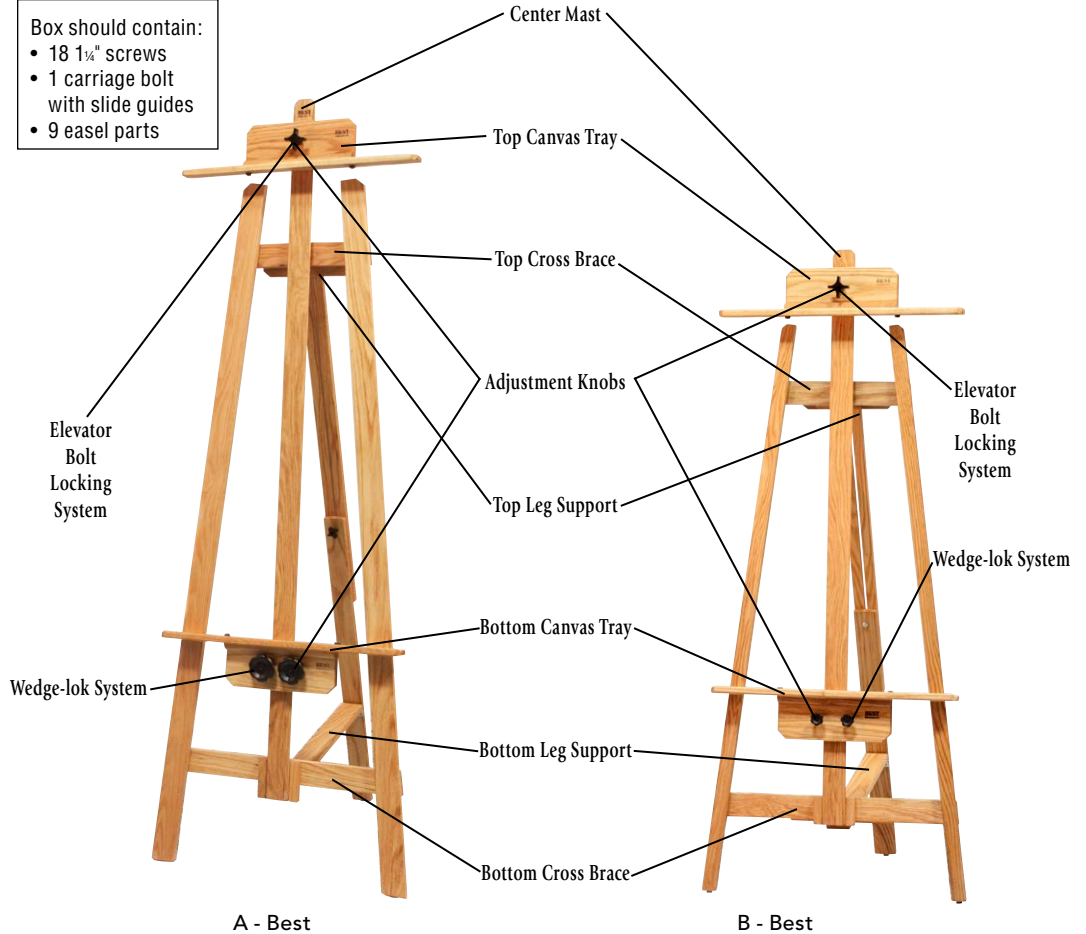


A - Best

B - Best

1) Check external & internal box for damages. Damage to box must be reported to UPS or trucking Company for claim. Once it leaves the warehouse, we are not responsible for damages. The BEST easels have been boxed for minimal damage. The corrugated boxes are made of 350# cardboard.

2) Take easel out and position parts as indicated in diagram 1-1. Secure using (12) 1/4" screws.

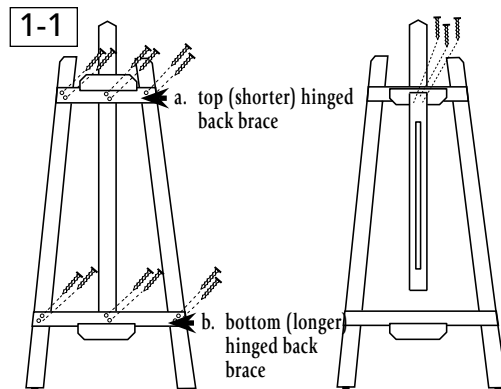

3) Attach top (See 1-1) and bottom (See 1-2) back braces to the hinged cross braces using (6) 1/4" screws through pre-drilled pilot holes.

4) Connect top and bottom sections of back leg with carriage bolt and slide guide.

5) Loosen the black knobs on top and bottom canvas trays. Slide onto center mast of easel & tighten knobs to the desired height.

